

# Rogue™ R1 Spot



The Rogue™ series brings unmatched value in feature-packed fixtures to the professional lighting market. Rogue™ R1 Spot brings innovation with its value, offering a rotating 3-facet prism to create stunning visual and aerial effects, plus a motorized iris and motorized focus for easy beam shaping. Rogue™ R1 Spot features two gobo wheels, one fully rotating/indexing with interchangeable gobos to fit your custom needs, and one wheel with fixed gobos that is fully and variably scrollable. Rogue™ R1 Spot also features incredibly crisp optics with a 16.5-degree beam angle, making any gobo look fantastic and clear, and an 8-color plus white color wheel that is fully and variably scrollable. Rogue™ R1 Spot comes ready to rock, featuring industry-standard Neutrik® powerCON® power input/output connections for power linking, and 3-pin and 5-pin DMX connections for ease of use.


## FEATURES

- Bold, bright 140 W LED light engine for punchy, solid beams
- Color wheel with 8 colors, split color ability, and continuous variable-speed scrolling
- Two gobo wheels: one fixed slot scrolling wheel and one rotating, interchangeable, scrolling wheel
- Iris and 3-facet prism for stunning effects
- Neutrik® powerCON® power input/output connections for power linking
- 3- and 5-pin DMX input/output connections
- Simple and complex DMX channel profiles for programming versatility

## COLORS



## GOBOS

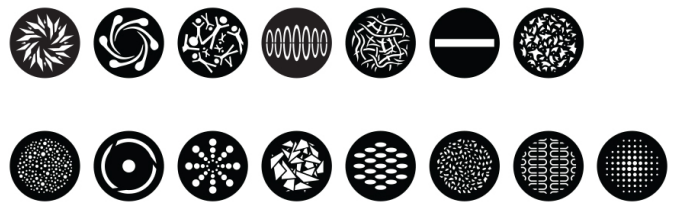

CONTINUED...

# Rogue™ R1 Spot (continued)

## SPECIFICATIONS

- DMX Channels: 16 or 19
- Data Connectors: 3- and 5-pin XLR
- Light Source: 1 LED (CW) 140 W, (6 A), 8250 K, 50,000 hours life expectancy
- Pan and Tilt: 540°/270°
- Pan and Tilt Ranges: 180°, 360°, 540° pan/90°, 180°, 270° tilt
- Automatic Pan/Tilt Correction: Yes
- Colors: 8 + white, split colors, continuous scroll at variable speeds
- Gobos (1): 7 + open (7 metal), rotating, interchangeable, indexing, slot-n-lock, continuous scroll at variable speeds
- Gobos (2): 8 + open (8 metal), continuous scroll at variable speeds
- Gobo Size: Gobo Wheel 1 (rotating): 26.9 mm (outside), 22.5 mm (image), 0.8 mm (max. thickness)
- Prism: 3 Facets, motorized, rotating
- Dimmer: Electronic
- Focus: Motorized
- Iris: Motorized
- Shutter/Strobe: Electronic
- Strobe Rate: 0 to 22 Hz
- Beam Angle: 16.5°
- Illuminance (total): 2,619 lux @ 5 m
- Color Temperature (at full): 8500 K
- IP Rating: IP20, dry location
- Cable Length: 5 ft (1.5 m)
- Power Connection: Edison plug to Neutrik® powerCON®
- Power Input: Neutrik® powerCON®
- Power Output: Neutrik® powerCON®
- Power Linking: 6 units @ 120 V; 12 units @ 208 V; 13 units @ 230 V
- Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)
- Power and Current: 225 W, 2.0 A @ 120 V, 60 Hz
- Power and Current: 224 W, 1.1 A @ 208 V, 60 Hz
- Power and Current: 220 W, 1.0 A @ 230 V, 50 Hz
- Weight (single unit): 36 lb (16.3 kg)
- Weight (road case): 160 lb (73 kg)
- Dimensions (single unit): 11.1 x 14.2 x 17.6 in (282 x 360 x 447 mm)
- Dimensions (road case): 42.1 x 19.3 x 33.5 in (980 x 450 x 800 mm)
- Approvals: CE, MET

